

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 5201-20400

First Inventor or Application Identifier Tuan Q. Dao

Title Modular and Scalable System Bus Structure

Express Mail Label No. EL280543967US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing) *D.J.K.*
2. ☒ Specification [Total Pages 21+1]
(preferred arrangement set forth below)
 - Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 5]
4. Oath or Declaration [Total Pages 4]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement of Power of Attorney (when there is an assignee)
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement filed in prior application, Status still proper and desired (PTO/SB/09-12)
14. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
15. ☐ Other: _____

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No: 09 / 257.840

Prior application information: Examiner N/A Group / Art Unit: N/A

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☐ Customer Number or Bar Code Label

or ☒ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name	Daniel J. Krueger		
	Conley, Rose & Tayon, P.C.		
Address	PO Box 3267		
City	Houston	State	TX
Country	USA	Zip Code	77253-3267
	Telephone	713-238-8000	Fax 713-238-8008

Name (Print/Type) Daniel J. Krueger

Registration No. (Attorney/Agent)

42,771

Signature

[Signature]


Date

6/30/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

PATENT
5201-20400
99-038

"EXPRESS MAIL" MAILING
LABEL NUMBER EL280543967US
DATE OF DEPOSIT 6-30-99
I HEREBY CERTIFY THAT THIS PAPER OR FEE IS
BEING DEPOSITED WITH THE UNITED STATES
POSTAL SERVICE "EXPRESS MAIL POST OFFICE
TO ADDRESSEE" SERVICE UNDER 37 C.F.R. §1.10
ON THE DATE INDICATED ABOVE AND IS
ADDRESSED TO THE ASSISTANT COMMISSIONER
OF PATENTS, WASHINGTON, D.C. 20231


Cynthia Huth

MODULAR AND SCALABLE SYSTEM BUS STRUCTURE

By:

TUAN Q. DAO
RICHARDSON, TX 75082
CITIZENSHIP: U.S.

PIUS NG
PLANO, TX 75024
CITIZENSHIP: B.N.O.

PAUL LOOK
RICHARDSON, TX 75082
CITIZENSHIP: U.S.

650E90" 228E4E60

Modular and Scalable System Bus Structure

RELATED APPLICATIONS

This application is a continuation-in-part of U.S. Patent Application No. 09/257,840 (Atty Dkt# 5201-19900) filed February 25, 1999 and entitled "Modular and Scalable System Architecture for Signal and Multimedia Processing" by T.Q. Dao, Pius Ng, and Paul Look. This parent application is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to the field of system bus architectures suitable for modular and scalable processing systems. More specifically, this invention relates to a bus structure that provides simultaneous high memory access bandwidth to multiple modules.

Description of the Related Art

Digital multimedia systems require a substantial digital signal processing capability. This requirement is shared by many other digital systems including image rendering systems, artificial vision systems, digital communication systems, and speech recognition systems. The typical architecture for such systems is shown in Fig. 1.

Fig. 1 shows a microcontroller bus 102 which couples a microcontroller 104 to a microcontroller memory 106. A digital signal processor (DSP) 108 is similarly coupled to a DSP memory 110 by a DSP bus 112. The two busses are coupled by a bus bridge 114.

This architecture is popular since the microcontroller 104 can assume the responsibility for system-level functions (such as controlling a user interface, initiating and terminating operation of various system modules, and coordinating data transfers), and the DSP 108 can

assume the responsibility for computationally-intensive tasks (such as various coding and compression algorithms, filtering operations, and data transforms). This division of labor eases system design and programming.

However, this architecture is inadequate for future generations of digital multimedia systems. The processing requirements are being increased as designers take advantage of compression algorithms and higher bandwidths to transmit more information. To keep pace, this architecture requires a more powerful DSP.

A more powerful DSP can be created in two ways. The clock speed can be increased, but this requires careful optimization and redesign of the DSP for every incremental improvement in semiconductor processing technology. Alternatively, the DSP can be provided with wider data paths, e.g. an 8-bit DSP could be replaced with a 32-bit DSP. However, the increases in the required area and power consumption are quadratic (i.e. to double the data path width, the area and power requirements increase by approximately a factor of four). This alternative is undesirable since power consumption is a perennial design constraint, particularly in view of the increasing popularity of portable devices.

Furthermore, larger data path widths are likely to be a poor "fit" for the data granularity, leading to inefficient use of the more powerful DSPs. For example, MPEG video compression operates on 8-bit blocks of video data. Even if multiple blocks were retrieved at a time, the DSP could only perform (at most) one 8-bit block operation per clock cycle. The rest of the data path width is unused for these operations.

To address these problems, this architecture may be modified by the addition of a dedicated hardware accelerator that is custom-designed to efficiently and quickly carry out specific algorithms. The hardware accelerator may be coupled to the DSP 108 and the DSP

memory 110 via the DSP bus 112. The DSP 108 then performs the less demanding computationally-intensive tasks of pre-processing and post-processing the data, and allows the hardware accelerator to perform the processing steps that the DSP 108 is too inefficient to perform.

5 If the hardware accelerator includes its own memory buffer, then direct memory transfers may be used to move the data across bus 112. This represents undesirable power consumption, but the alternative is to require that the DSP bus 112 provide a high bandwidth connection between the hardware accelerator and DSP memory 110. This alternative presents a memory contention issue that practically requires the DSP 108 to halt whenever the hardware accelerator
10 is operating. Consequently, DSP bus 112 becomes a bottleneck that restricts system performance.

Accordingly, it is desirable to have a high-bandwidth bus structure that is suitable for modular and scalable processing systems.

15 SUMMARY OF THE INVENTION

A high-bandwidth data transfer apparatus that is suitable for modular and scalable processing systems is disclosed. In one embodiment, the data transfer apparatus includes a local bus between each of several processing devices and associated memory modules. The local busses are each coupled to a cross-bus through a bus bridge that consists of multiplexers to steer address and
20 data signals from a local bus along the cross-bus to another local bus. The multiplexer structure of the bridges allows the cross-bus to be dynamically divided into segments in any suitable manner to support multiple concurrent links over the cross-bus. A controller is provided to set the multiplexers in accordance with transfer requests that it receives from the various processing devices. The

transfer requests may be of various types such as: single transfer, block transfer, and/or message transfer. The controller may include a request queue for each type of transfer request. The controller may also include a direct memory access controller (DMA) for facilitating the block transfers, and may further include an interrupt controller for notifying the processing devices of various events such as: receipt of a message transfer request, completion of block transfer, and/or memory protection violation. The data transfer apparatus may include a processor interface port for each processor. The ports may be configured to enforce programmable memory protection settings. When applied to multimedia systems with a microcontroller, one or more digital signal processors, and one or more hardware accelerators, this data transfer apparatus is expected to provide a substantial increase in processing capabilities that can be maintained under power consumption constraints and that will be enhanced as semiconductor technologies continue to improve.

BRIEF DESCRIPTION OF THE DRAWINGS

A better understanding of the present invention can be obtained when the following detailed description of the preferred embodiment is considered in conjunction with the following drawings, in which:

Fig. 1 shows a system architecture for a multimedia device with a digital signal processing subsystem;

Fig. 2 is shows a modular, scalable bus architecture according to the present invention;

Fig. 3 is a functional block diagram of a first system embodiment that employs a bus architecture according to the present invention;

Fig. 4 is a functional block diagram of a second system embodiment that employs a bus architecture according to the present invention;

Fig. 5 is a functional block diagram of a transfer master;

Fig. 6 shows an illustrative memory write-protection portion of a device port;

Fig. 7 is a functional block diagram of a router;

Figs. 8 is a functional block diagram of a data channel bridge; and

Fig. 9 is a functional block diagram of an address bus bridge.

While the invention is susceptible to various modifications and alternative forms, specific embodiments thereof are shown by way of example in the drawings and will herein be described in detail. It should be understood, however, that the drawings and detailed description thereto are not intended to limit the invention to the particular form disclosed, but on the contrary, the intention is to cover all modifications, equivalents and alternatives falling within the spirit and scope of the present invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

Fig. 2 shows a modular, scalable, bus architecture that supports concurrent high-bandwidth memory connections for each processor element in the system, and that is suitable for systems employing one or more digital signal processors and hardware accelerators. As will be apparent after reading the following disclosure, systems employing this bus architecture may be easily scaled and customized to specific applications. The customization can address various system design constraints such as power consumption, performance, and re-use of existing modules.

The architecture as shown in Fig. 2 includes three portions: a memory portion 202, a data transfer portion (transfer master) 204, and a processor portion 206. Memory portion 202 is an

array of memory units and memory mapped devices each coupled to the transfer master 204 by address, data, and control lines.

The memory units preferably receive enable, read, and write control signals on the control lines, and respond in the standard manner. In other words, an enabled read operation causes a memory unit to provide *read data* on the data lines. Read data is a set of signals that represent data retrieved from a memory location identified by the address signals. An enabled write operation causes a memory module to store *write data* from the data lines in a memory location identified by the address signals. When the memory unit is not enabled, it takes no action.

The memory units preferably consist of memory modules that have a common data width, preferably eight bits. Memory modules may be combined to form a "memory unit" where greater data widths are needed. The depth (number of storage locations) of the memory modules may vary between memory units. Each memory module preferably has a read port and a write port. Such a memory module can be implemented using a time-multiplexed single port memory. In other words, a memory which supports only one access at a time (a single port memory) can be clocked at twice the system clock and the accesses may be alternated between read and write operations. This is not a fundamental requirement of the architecture, and other embodiments employing single port memory modules and multi-port memory modules (memory modules which support multiple simultaneous read/write accesses) are also contemplated.

It is noted that the design of the memory modules may be determined independently of the design and arrangement of the data transfer portion 204 and the processor portion 206. The transfer master 204 preferably provides a standardized interface to which the memory modules may be coupled.

Transfer master 204 independently coordinates all inter-processor, inter-memory, and processor-memory communications. The structure of transfer master 204 is discussed further below. However, it is noted here that the transfer master operates to organize the memory portion 202 into a shared memory which is wholly accessible (subject to programmable memory protection settings) to each processor unit. The processor units are each assigned ownership of a memory module. The memory module corresponds to a memory "page" (the size of each memory page is individually configurable). Access to memory pages owned by other processor units may be obtained by a given processor unit by setting the given processor unit's page pointer to point to the desired memory page. Memory addresses from a processor unit are treated as offset addresses from the address indicated by the processor unit's page pointer.

It is noted that using a shared memory largely eliminates the need for block transfers of memory (block transfers may still be desired, *e.g.* for creating multiple copies of data). This is expected to provide advantages to the system in terms of reduced power consumption and increased memory bandwidth. It is further noted that the use of page pointers eliminates any memory size limitations that the fixed width of a processor unit's address path might otherwise impose. This allows a system to be scaled as needed without any redesign of the processor units.

Processor portion 206 is an array of two or more processor units. The processor units may be of various types such as a digital signal processor (DSP), a hardware accelerator (denoted "ACCEL" in the figures), a microcontroller unit (MCU), or an interface port to a system including any one of these. The transfer master 204 preferably provides a standardized interface for coupling to the processor units. The processor units are coupled to the transfer master 204 by control lines, address lines, and data lines. The control lines preferably carry control signals such as Enable, Read, Write, Ready, and Interrupt. The processor units preferably provide the Enable,

Read, and Write signals on the control lines, and receive the Ready and Interrupt signals. The control lines may further carry transfer request signals from the processor units. These signals preferably include a transfer type, a transfer source, a transfer target, and a transfer size.

To send data, a processor unit provides an address on the address lines, data on the data lines, and a transfer request on the control lines. The processor unit then asserts the Enable signal and the Write signal. The transfer master 204 transfers the data and asserts the Ready signal when it is ready for any subsequent data transfer operation. To receive data, a processor unit provides an address on the address lines and a transfer request on the control lines, asserts the Enable signal and the Read signal, and waits for an assertion of the Ready signal. The transfer master 204 retrieves the data and provides the data on the data lines, then asserts the Ready signal to indicate that the data is available. It is noted that the design of the processor units is determined independently of the design and arrangement of other processor units, the transfer master 204, and the memory portion 202. This is achieved through the use of a standardized processor interface provided by the transfer master 204.

Fig. 3 shows a functional block diagram of one system embodiment that illustratively employs the present architecture. The system includes a microcontroller bus 102 which couples a microcontroller unit 104 to a microcontroller memory 106 and a bus bridge 308. Bus bridge 308 couples microcontroller bus 102 to a peripheral bus 310, whereby the microcontroller 104 can access peripheral devices 312 and external memory 314. Peripheral devices 312 preferably provide an interface to the external environment whereby the microcontroller unit 104 can obtain input data and instructions and can provide output results. External memory 314 preferably provides long term program and data storage when the system is powered down.

Coupled to the microcontroller bus 102 is a microcontroller unit (MCU) port 316, whereby the microcontroller 104 may communicate with the numerical processing subsystem. A transfer master 204 is coupled to the MCU port 316 and various special purpose processors such as a hardware accelerator 318 and a digital signal processor (DSP) 320. Transfer master 204 coordinates data transfers between the array of processors (including the microcontroller 104 via MCU port 316) and a logically-mapped shared memory 322 via data path 324. Transfer master 204 handles memory-to-memory, memory-to-processor, processor-to-memory, and processor-to-processor data transfers.

Shared memory block 322 represents the logical map of the memory address space as it appears to the processors. The shared memory is preferably used to store program instructions (PMEM) and data (DMEM) for each of the processors, as well as mailbox information (for inter-processor communication), memory configuration information, and interrupt queue information. The memory is divided into pages, with ownership, reading, writing, and execution privileges of each processor for each page being assigned in the memory configuration information. Subject to these programmed privileges, the transfer master 204 allows every processor to read or write from any of the memory pages. Each processing unit supplies a page pointer to the transfer master 204 as part of the transfer request information (the transfer source or target). The individual processor units gain access to the various memory pages by setting their page pointers accordingly.

It is noted that logically-mapped shared memory 322 and data path 324 are conceptual representations provided for explanatory purposes, and are not necessarily present as physical circuits in an implemented system. Rather, the shared memory 322 is preferably implemented partially as registers (for memory configuration and the interrupt queue) and partially as separate,

strategically placed memory modules of various sizes. Data path 324 preferably comprises a plurality of address and data busses which are routed to corresponding memory modules, registers, and memory-mapped devices.

In a preferred embodiment, the program instructions for each of the processor units are kept in memory array 202. In an alternate embodiment, the program instructions may be kept in dedicated memories coupled directly to the processor units. Other embodiments are also contemplated that employ some combination of this.

Fig. 4 shows a functional block diagram of a second system embodiment that illustratively employs the present architecture. In this system embodiment, the microcontroller 104 is coupled directly to the transfer master 204. The microcontroller memory, external memory, and peripherals are coupled to the transfer master 204 and logically mapped into the shared memory 322.

Fig. 5 shows an exemplary embodiment of transfer master 204. Transfer master 204 preferably comprises port buffer logic 402 for latching address, write data, and control signals from the processors, and for driving control and read data signals to the processors. The port buffer logic 402 may additionally provide timing synchronization, control signal generation, and multiplexing/de-multiplexing functions, as necessary.

Port buffer logic 402 couples the address and data signals from processors 104 (possibly via MCU port 316), 318, and 320, to router 404, and also receives control signals from memory management unit (MMU) 406. The memory management unit 406 provides the control signals to port logic 402 and a conflict-free access pattern 410 to router 404 in response to transfer requests stored in one or more request queues 408. Processor units 104, 318, 320 place transfer requests in the queues 408 via transfer request lines 412.

Request queues 408 preferably include a single transfer queue, a block transfer queue, and a mailbox message queue. Single transfers are transfers of a single word. They are intended for fast transfers between a processing unit and the corresponding memory module, and are accordingly assigned highest priority. Block transfers are transfers of a block of memory. Block transfers are intended primarily for direct memory access (DMA)-type transfers of data between memory modules. The priority of these transfers is user-configurable, and these transfers can be interrupted by transfers having a higher priority (such as single transfers). Mailbox messages notify a target processing unit of the need to carry out a transfer of information from a specified address. Mailbox messages are intended for transfers of information between processing units. The target devices are notified of the existence of the message via an interrupt, and the transfer is carried out in a manner determined by the target processing unit.

The MMU 406 responds to the contents of the request queues by establishing an access pattern that provides for the highest priority transfer requests and as many other transfer requests as possible without creating an access conflict. This conflict-free access pattern 410 is provided to the router 404. The pattern signal 410 sets switches in the router to establish connections between the processing units and memory modules 420-428 that will allow for the transfer requests to occur. It is noted that configuration and status registers for the transfer master 204 may be accessible as one of the memory mapped devices 428. The MMU 406 may provide control signals to the port logic 402 to delay accesses that cannot occur in the context of the chosen access pattern 410.

The MMU preferably maintains a distributed memory configuration table that tracks such things as read, write, and execute permissions of each processor for each memory page. In one embodiment, the MMU 406 provides control signals to port logic 402 to enforce memory

protection. For example, Fig. 6 shows one way to implement memory write protection. One embodiment of a port 402 includes a configurable acceptance table 501 and a pass gate 502. MMU processes the contents of the request queues 408 and generates a transfer target identifier for each of the ports 402. The transfer target is provided to acceptance table 501, which
5 responsively asserts or de-asserts an accept signal. A pass gate 502 logically ANDs the accept signal with the write request signal from the processing unit. The output of pass gate 502 is a write enable signal that is suppressed if the transfer target is not one of the allowable write-transfer targets as specified by the acceptance table 501. It is noted that a status bit may be set in one of the transfer master status registers to indicate the detection of an attempted illegal write.

10 Referring back to Fig. 5, transfer master 204 also preferably includes an interrupt control unit (ICU) which provides interrupt signals 414 to each of the processors. The interrupts may be used for block transfers, mailbox messages, memory protection violations, etc. Processors can initiate block transfers of data by writing a block transfer request to the block transfer queue. The MMU 406 will then handle the address generation and routing for block transfers of data. The
15 ICU can be configured to assert an interrupt to the block transfer requestor to notify the requestor of the completion of the transfer.

Processors can communicate by writing mailbox messages to other processors. After the MMU 406 determines that a mailbox message is present in the request queue, the ICU asserts an interrupt to notify the addressee of the message's existence. If the MMU 406 detects the DSP
20 writing to the hardware accelerator's memory page without programmed write permission, the ICU may assert an interrupt to alert one of the processors of the memory protection violation.

It is expected that MMU 406 will have a relatively uncomplicated (and therefore fast) implementation much simpler than a typical general purpose memory controller for a shared

memory system. Each processor's accesses to its own memory pages are expected to incur no latency (i.e. read data is received on the first clock cycle subsequent to the clock cycle in which the address is provided), and only a minimal latency is expected to be incurred by accesses to other memory pages.

5 Fig. 7 shows a functional block diagram of an exemplary embodiment of router 404. Router 404 couples port logic 402 and direct memory access (DMA) controller 504 to memory modules 420-424, external memory 426, and memory mapped devices 428. DMA controller 504 is the portion of MMU 406 that conducts block transfers. It may be configured to generate addresses to read data from the source memory into a cache, and then to generate addresses to
10 write data from the cache into the target memory. DMA controller 504 preferably includes logic to handle word-size and word-alignment issues that can crop up when data is transferred in blocks.

 Router 404 includes bi-directional data channel bridges 506 and uni-directional address bus bridges 508. Router 404 preferably divides the data busses into data channels of uniform
15 width, e.g. 8-bits. The channel bit-width is chosen to be a common integer factor of popular data bus bit-widths. Each data channel is coupled by a channel bridge 506 to a cross-bus data channel having the same bit-width. The address busses are be similarly coupled via address bridges 508 to an address cross-bus. The cross-bus preferably has a ring structure, i.e. the channel bridges at the bottom of Fig. 7 are coupled via the dashed arrows to the corresponding bridges at the top of
20 Fig. 7.

 Although this embodiment shows three processing units and the data channels in this embodiment are described as having eight bit data path widths, these numbers are not intended to be limiting in any way. Rather, the bus architecture is intended to be general, and is capable of

being implemented in a wide variety of embodiments. Features of such embodiments may include having more channels, more processors, and perhaps larger data path widths. The memory modules may be multi-ported, in which case more data busses are expected to be associated with each memory module.

5 The read and write data paths preferably have eight-bit widths, as do the data cross-paths. Each of the bi-directional data paths are coupled to both directions of a cross-bus data channel by a bi-directional channel bridge 506, while each of the address paths are coupled to both directions of an address cross-bus by a unidirectional address bus bridge 508.

10 Preferred embodiments for bridges 506, 508 are shown in Figs. 8 and 9, respectively. The bridges include buffers 602 for the cross-bus signals, and multiplexers 604 for each of the outgoing signals. A multiplexer 604 for an outgoing signal selects from incoming signals from the other three directions. In the case of the unidirectional bridge 504, one of the incoming signals and one of the outgoing signals is removed. Consequently, the hardware is simplified and a two-input multiplexer 606 can be used. Control signals are provided from MMU 406 to the
15 multiplexers 604, 606 to direct the bus signals as desired.

20 The buffers 602 may perform a latching function. In other words, the buffers latch bit signals from input bit lines, and provide the latched bit signals on the output lines on a subsequent clock cycle. This allows the cross-path to be divided into shorter segments that can carry different bit signals concurrently. However, propagation between segments accrues a latency of one clock-cycle per segment. Consequently, it may be desirable to provide some bridges with non-latching buffers to keep the number of segments to a minimum. In this manner, a trade-off between throughput and cross-path latency may be achieved.

It is noted that address paths do not necessarily have uniform bit widths, and consequently, the bit width of the address cross-path must be adequate to support the maximum address path bit width. At those junctions where the address path bit width is less than the cross-path bit width, not all of the cross-bus address bit lines are coupled to the memory address bit lines.

Multimedia systems typically have audio, video, administrative, and real-time tasks. The processor units generally need to trade data back and forth to carry out all these tasks. However, it is noted that these data exchanges are not random or unstructured. Rather, the tasks performed by multimedia systems tend to be well-defined tasks involving known memory sizes and predictable communications paths. If the memory modules are configured to support simultaneous reads and writes, memory access collisions can often be minimized by the software programmer. In the embodiment of Fig. 5, the microcontroller unit is expected to communicate primarily with the DSP, and only rarely directly with the hardware accelerator. Similarly, the hardware accelerator is expected to communicate primarily with the DSP and only rarely with the microcontroller unit. Consequently, the DSP is located on the cross-bus between the microcontroller unit and the accelerator and adjacent to both. This allows the processor units to realize a minimal latency when accessing "local" (their own) or "adjacent" (owned by the neighboring processor unit) memory pages.

As an example of the operation of the cooperative processing operations of the processor array, a video macroblock decoding operation is now described. Microcontroller 104 may be executing an operating system that instructs a memory mapped device to download an encoded video macroblock to the DSP memory 422 four bytes at a time. The microcontroller 104 then writes a "Start Viterbi Algorithm" mailbox message to the DSP's mailbox (the message may be

written to the MCU memory 420, and a mailbox message transfer request sent to MMU 406). The DSP 320 receives the message and decodes the video macroblock using the Viterbi algorithm, writing the results to the hardware accelerator's memory 424. The DSP 320 sends a message to the accelerator's mailbox to start the inverse discrete cosine transform of the decoded macroblock. The accelerator 318 performs the IDCT, writing pixel results to the a video buffer in the memory mapped devices 428. Upon completion, the accelerator 318 sends a message to notify the MCU 104 of the completed transfer of the decoded video block to the video buffer.

Although digital signal processors and hardware accelerators have previously been used together with a microcontroller in multimedia systems, there has been no standardized method for coupling them together that would readily support the addition of more processing units without creating a performance bottleneck in the system. The disclosed architecture resolves these issues and further provides a logically-mapped shared memory. By providing a logically mapped shared memory and standardized interface ports, the disclosed architecture simplifies many programming and system design issues. The disclosed architecture also benefits in terms of scalability from the use of uniform-width data channels and the modularized memory. Finally, the use of request queues may provide for a way to eliminate critical path issues from the transfer master design, and thereby enable the architecture to "ride the technology curve", i.e. allow systems employing this architecture to be implemented using the newest integrated circuit technology with little or no system re-design.

As an advantage of the ability to scale the system, various system implementations may be designed with various numbers of processing units and/or various transfer master routing efficiencies (i.e. various effective bandwidths to memory) to provide a customer with a customized cost/performance tradeoff. Numerous such variations and modifications will become

apparent to those skilled in the art once the above disclosure is fully appreciated. It is intended that the following claims be interpreted to embrace all such variations and modifications.

CLAIMS

WHAT IS CLAIMED IS:

1. A data transfer apparatus that comprises:

a plurality of busses each configured to couple a processing device to a corresponding
5 memory module;

at least one cross-bus coupled to each of the plurality of busses by one or more bus bridges,
wherein the bus bridges each include a set of multiplexers that are configurable to
steer signals from the bus to the cross-bus, and are further configurable to steer
signals from the cross-bus to the bus; and

10 a memory management unit configured to receive memory access requests from a plurality
of processing devices and to responsively configure the bus bridges to steer address
and data signals accordingly.

2. The data transfer apparatus of claim 1, wherein the memory management unit includes a DMA
controller coupled to the cross-bus and configurable to transfer a block of data between said
15 memory modules.

3. The data transfer apparatus of claim 2, wherein the memory management unit includes an
interrupt controller configurable to assert an interrupt signal to said processing devices after
completing a block transfer of data.

4. The data transfer apparatus of claim 1, wherein the memory management unit includes one or
20 more request queues, wherein said one or more request queues includes a single transfer queue
configured to store access requests relating to single data word transfers.

5. The data transfer apparatus of claim 4, wherein said one or more request queues includes a block
transfer queue configured to store access requests relating to block data transfers.

6. The data transfer apparatus of claim 4, wherein said one or more request queues includes a message transfer queue configured to store message transfer requests.

7. The data transfer apparatus of claim 6, wherein the memory management unit includes an interrupt controller configurable to assert an interrupt signal to a processing device that is an addressee of a message transfer request.

8. The data transfer apparatus of claim 1, further comprising:

port logic connected to the plurality of busses and configured to couple to the processing devices, wherein the port logic is further coupled to the memory management unit and configured to prevent writes to protected memory.

9. The data transfer apparatus of claim 1, wherein the plurality of busses includes two unidirectional bit lines for each data bit and the at least one cross-bus includes two unidirectional bit lines for each data bit, and wherein the bus bridges include a multiplexer for each outgoing bit line that selects from three other incoming bit lines.

10. The data transfer apparatus of claim 1, wherein said plurality of busses includes at least three busses.

11. A method for transferring data between a set of memory modules and a set of processor units, wherein the method comprises:

said processing units providing transfer requests to a memory manager;

said memory manager setting a router in a conflict-free access pattern in response to said transfer requests, wherein setting said router includes:

said memory manager providing control signals to bus bridges that couple local busses between a memory module and a processing device to a cross-bus between the local busses; and

said processing units accessing memory modules via said router.

12. The method of claim 11, wherein before setting said router, said memory manager determines said conflict-free access pattern in accordance with assigned priorities for each transfer request.

13. The method of claim 11, wherein said setting said router further includes:

5 said memory manager operating a direct memory access (DMA) controller to perform block transfers of data between memory modules.

14. The method of claim 11, further comprising said memory manager asserting an interrupt signal to any one of said processor units that is the addressee of a message transfer request.

15. A high-bandwidth bus which comprises:

10 a plurality of local bus means each for transferring data between a processing device and an associated memory module;

 a cross-bus means for transferring data among the plurality of local bus means, wherein said cross-bus means is coupled to each of the plurality of local bus means by a bridge means; and

15 a memory controller means for setting said bridge means to provide processing devices with access to memory modules, wherein the memory controller means is configured to provide highest priority for accesses from processing devices to the associated memory modules.

ABSTRACT

A high-bandwidth data transfer apparatus that is suitable for modular and scalable processing systems is disclosed. In one embodiment, the data transfer apparatus includes a local bus between each of several processing devices and associated memory modules. The local
5 busses are each coupled to a cross-bus through a bus bridge that consists of multiplexers to steer address and data signals from a local bus along the cross-bus to another local bus. The multiplexer structure of the bridges allows the cross-bus to be dynamically divided into segments in any suitable manner to support multiple concurrent links over the cross-bus. A controller is provided to set the multiplexers in accordance with transfer requests that it receives from the
10 various processing devices. The transfer requests may be of various types such as: single transfer, block transfer, and/or message transfer. The controller may include a request queue for each type of transfer request. The controller may also include a direct memory access controller (DMA) for facilitating the block transfers, and may further include an interrupt controller for notifying the processing devices of various events such as: receipt of a message transfer request,
15 completion of block transfer, and/or memory protection violation. The data transfer apparatus may include a processor interface port for each processor. The ports may be configured to enforce programmable memory protection settings. When applied to multimedia systems with a microcontroller, one or more digital signal processors, and one or more hardware accelerators, this data transfer apparatus is expected to provide a substantial increase in processing
20 capabilities.

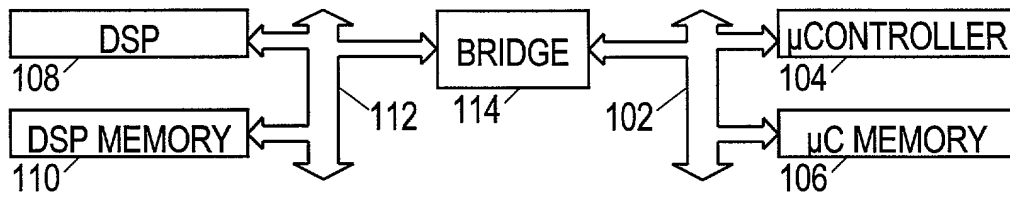


FIG. 1

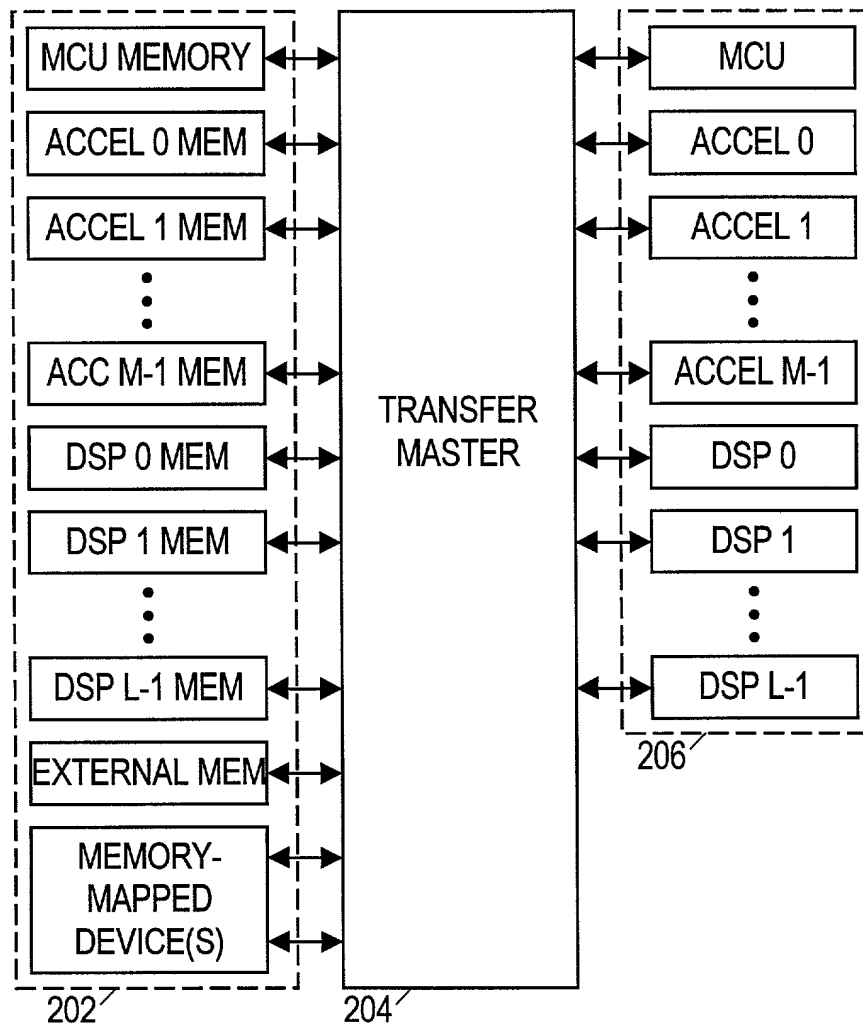


FIG. 2

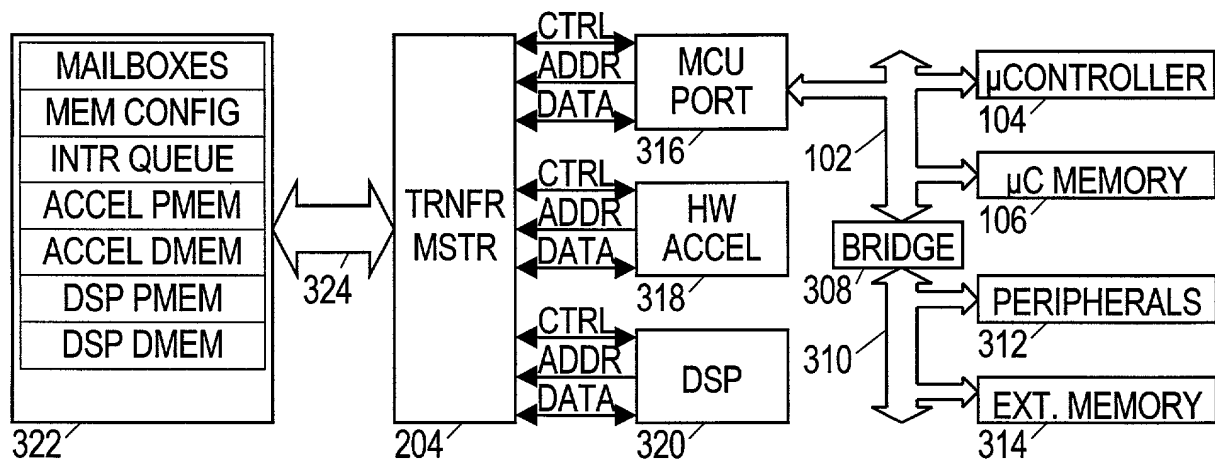


FIG. 3

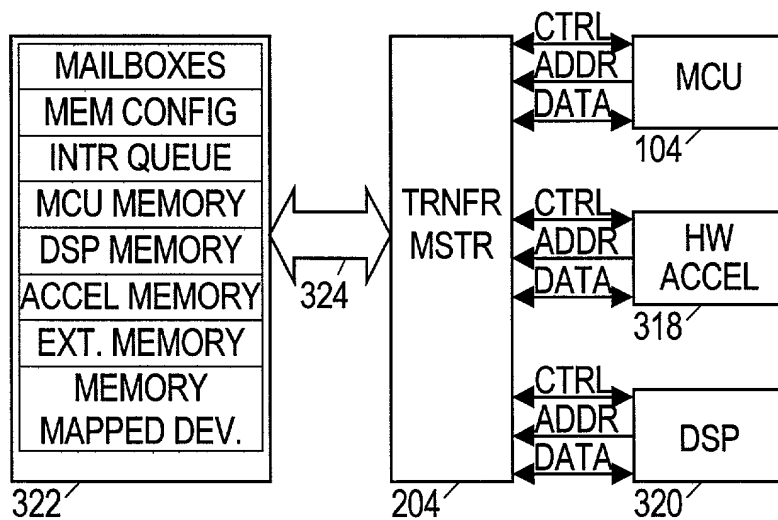


FIG. 4

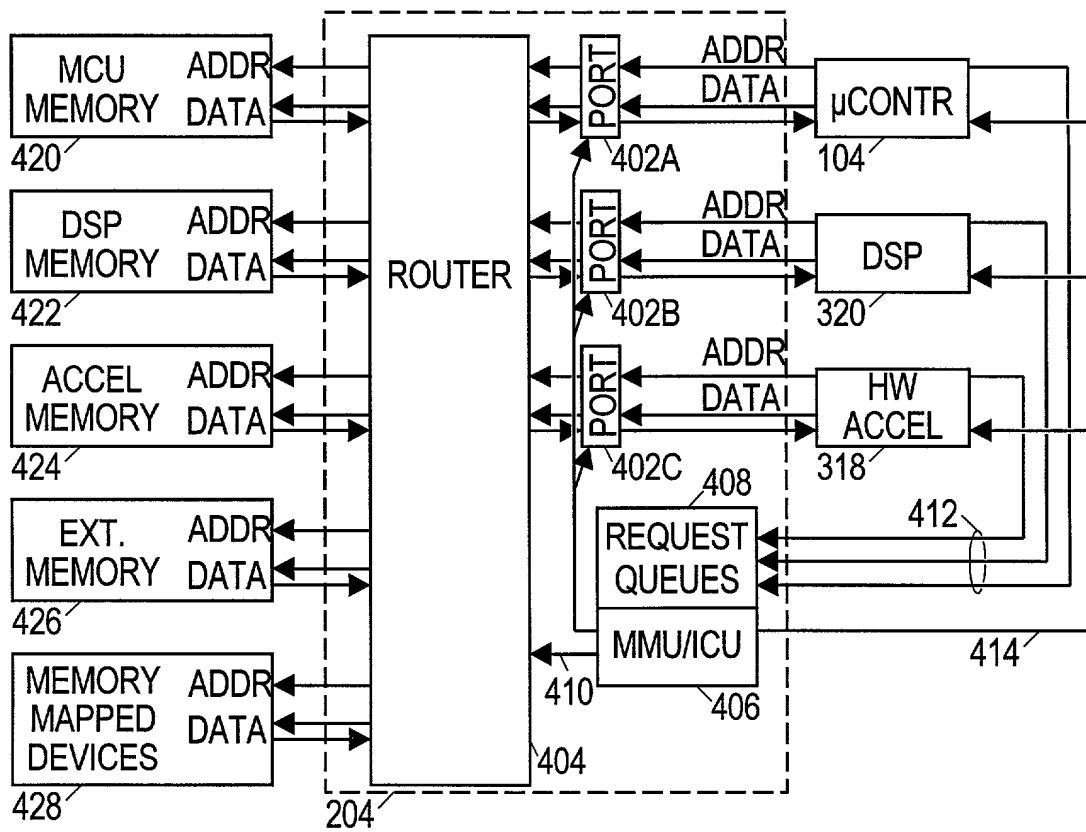


FIG. 5

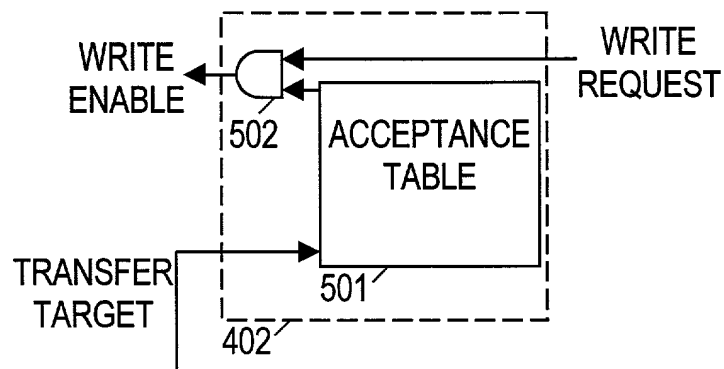


FIG. 6

FIG. 7

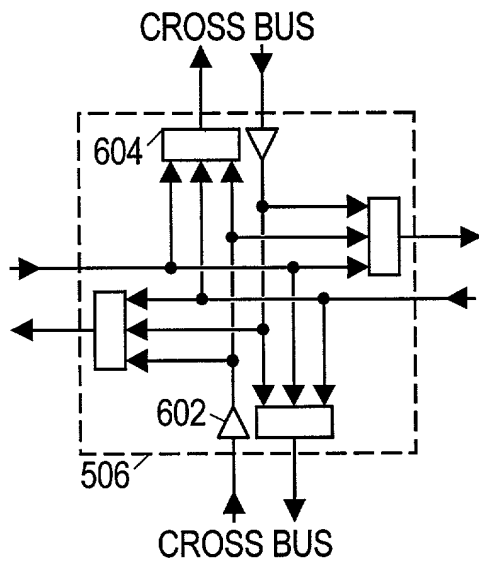


FIG. 8

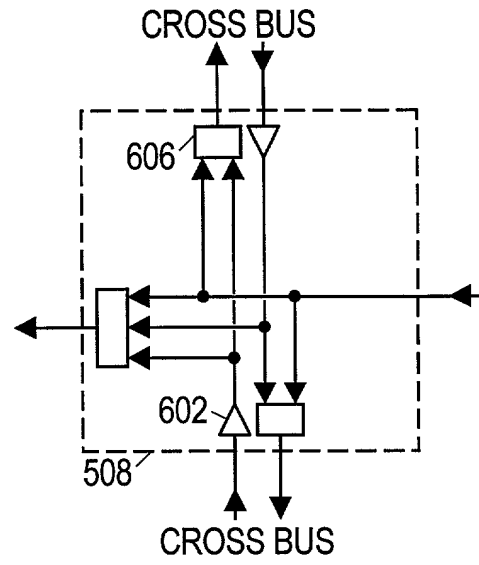


FIG. 9

Please type a plus sign (+) inside this box → ☐

Express Mail Label No.: EL280543967US

PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**DECLARATION FOR UTILITY OR
DESIGN
PATENT APPLICATION
(37 CFR 1.63)**

☒ Declaration Submitted with Initial Filing **OR** ☐ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

Attorney Docket Number 5201-20400

First Named Inventor Tuan Q. Dao

COMPLETE IF KNOWN

Application Number /

Filing Date Concurrently Herewith

Group Art Unit N/A

Examiner Name N/A

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Modular and Scalable System Bus Structure

the specification of which (Title of the Invention)

☒ is attached hereto
OR

☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International

Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box →



PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
09/257,840	02/25/99	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☒ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here

Name	Registration Number	Name	Registration Number
Daniel J. Krueger	42,771	Jeffrey W. Tayon	30,717
David A. Rose	26,223	Jeffrey C. Hood	35,198
Gregory L. Maag	32,363	B. Noel Kivlin	33,929
Michael F. Heim	32,702	Kevin L. Daffer	34,146

☒ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to:

☐ Customer Number

or Bar Code Label

OR

☒ Correspondence address below

Name	Daniel J. Krueger				
Address	Conley, Rose & Tayon, P.C.				
Address	PO Box 3267				
City	Houston	State	TX	ZIP	77253-3267
Country	USA	Telephone	713-238-8000	Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
Tuan Q.		Dao					
Inventor's Signature			Date	6/25/99			
Residence: City	Richardson	State	TX	Country	USA	Citizenship	USA
Post Office Address	3116 Fernhurst Drive						
Post Office Address							
City		State		ZIP		Country	

☒ Additional inventors are being named on the ☒ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

DECLARATION		REGISTERED PRACTITIONER INFORMATION (Supplemental Sheet)	
Name	Registration Number	Name	Registration Number
David Pursel	28,659		
Sandeep Jaggi	43,331		
Ralph Vesell	33,807		
Bruce Hopenfeld	39,714		
Wayne P. Bailey	34,239		
David K. Lucente	36,202		
Eric B. Meyertons	34,876		
Darryl J. Adams	41,424		
Mark L. Berrier	35,066		
Dan R. Christen	39,943		

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → +



PTO/SB/02A (3-97)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet

Page 1 of 1

Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Pius				Ng			
Inventor's Signature				Date		6/24/98	
Residence: City		Plano		State		TX	
				Country		USA	
Post Office Address		6400 Ohio Dr., #1227					
Post Office Address							
City				State		ZIP	
				Country		USA	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Paul				Look			
Inventor's Signature				Date		6/24/98	
Residence: City		Richardson		State		TX	
				Country		USA	
Post Office Address		3041 N. Jupiter Rd, Apt. 45-C					
Post Office Address							
City				State		ZIP	
				Country		USA	
Name of Additional Joint Inventor, if any:				<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])				Family Name or Surname			
Inventor's Signature				Date			
Residence: City				State		Country	
				USA		Citizenship	
Post Office Address							
Post Office Address							
City				State		ZIP	
				Country		USA	

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.